

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representation of  
The original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORLED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

G02F 1/1335

A3

(11) International Publication Number:

WO 96/06380

(43) International Publication Date:

29 February 1996 (29.02.96)

(21) International Application Number:

PCT/IB95/00644

(22) International Filing Date:

14 August 1995 (14.08.95)

(30) Priority Data:

94202402.7 23 August 1994 (23.08.94) EP

(34) Countries for which the regional or  
international application was filed: NL et al.

95200119.6 18 January 1995 (18.01.95) EP

(34) Countries for which the regional or  
international application was filed: NL et al.(81) Designated States: JP, KR, SG, European patent (AT, BE, CH,  
DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

## Published

*With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(88) Date of publication of the international search report:


2 May 1996 (02.05.96)

(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groe-  
newoudseweg 1, NL-5621 BA Eindhoven (NL).(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE];  
Kottbygatan 5, Kista, S-164 85 Stockholm (SE).(72) Inventors: VAN HAAREN, Johannes, Albertus, Mathijs,  
Maria; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  
BROER, Dirk, Jan; Groenewoudseweg 1, NL-5621 BA  
Eindhoven (NL).(74) Agent: RAAP, Arias, Yde; Internationaal Octrooibureau B.V.,  
P.O. Box 220, NL-5600 AE Eindhoven (NL).

(54) Title: LIQUID CRYSTAL DISPLAY DEVICE AND RETARDATION FOIL

## (57) Abstract

A liquid crystal display cell is provided with a compensation layer which, viewed transversely to the cell, has a broken (non-rotationally) symmetrical refractive index pattern or indicatrix. To obtain a small angle dependence, the associated birefringence of the compensation layer is complementary to that associated with a given voltage across the liquid crystal cell, so that the optical axis of the compensation layer substantially coincides with the direction of the directors in the driven state. The compensation layer can be manufactured in many different ways by making use of cholesteric foils or foils based on discotic LC materials.

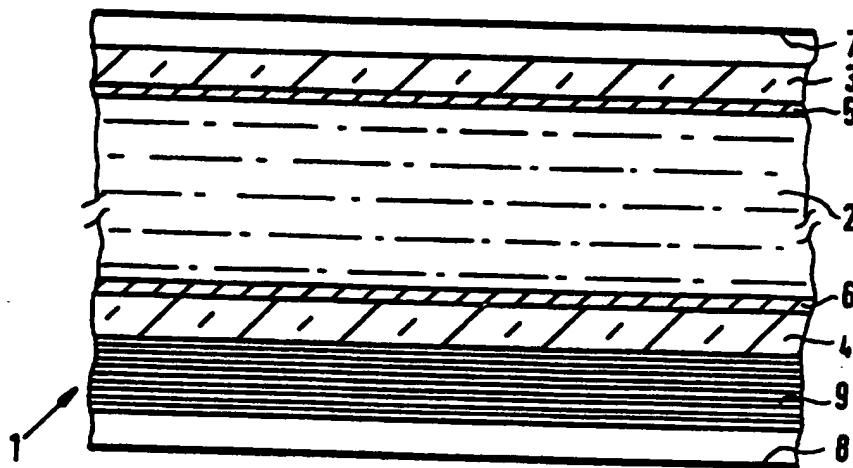

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00644

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G02F 1/1335

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0576931 A2 (CASIO COMPUTER COMPANY LIMITED), 5 January 1994 (05.01.94), column 7, line 5 - column 8, line 26; column 12, line 8 - column 15, line 16 --	1-14,18-28
X	EP 0576342 A1 (THOMSON CONSUMER ELECTRONICS), 29 December 1993 (29.12.93), page 2, line 11 - line 23; page 4, line 1 - line 7; page 4, line 49 - line 56 --	1-8,11-13, 18-22,25-27
X	GB 2272779 A (FUJI PHOTO FILM CO LTD), 25 May 1994 (25.05.94), page 4, line 7 - line 20; page 54 --	1-8,11-13, 18-22,25-27



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

7 March 1996

Date of mailing of the international search report

11-03-1996

Name and mailing address of the ISA/

Swedish Patent Office

B x 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peter Jacobsson

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00644

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0352724 A1 (KABUSHIKI KAISHA TOSHIBA), 31 January 1990 (31.01.90), column 4, line 11 - column 5, line 21  --	1-8, 11-13, 18-22, 25-27
A	US 5241408 A (KABUSHIKI KAISHA TOSHIBA), 31 August 1993 (31.08.93), column 8, line 55 - line 57, abstract  -- -----	1-31

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

05/02/96

International application No.

PCT/IB 95/00644

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0576931	05/01/94	NONE	
EP-A1- 0576342	29/12/93	NONE	
GB-A- 2272779	25/05/94	DE-A- 4339395 JP-A- 6214116	19/05/94 05/08/94
EP-A1- 0352724	31/01/90	JP-A- 2037319 KR-B- 9402194 US-A- 5018839	07/02/90 18/03/94 28/05/91
US-A- 5241408	31/08/93	EP-A, A, A 0498614 JP-A- 5040277	12/08/92 19/02/93

**PCT**WORLD INTELLECTUAL PROP  
International B

INTERNATIONAL APPLICATION PUBLISHED UNDEF

WO 9606380A2

(51) International Patent Classification <sup>6</sup> :

G02F 1/1335

A2

(11) International Publication Number:

WO 96/06380

(43) International Publication Date:

29 February 1996 (29.02.96)

(21) International Application Number: PCT/IB95/00644

(22) International Filing Date: 14 August 1995 (14.08.95)

(30) Priority Data:

94202402.7 23 August 1994 (23.08.94) EP

(34) Countries for which the regional or  
international application was filed: NL et al.

95200119.6 18 January 1995 (18.01.95) EP

(34) Countries for which the regional or  
international application was filed: NL et al.(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groe-  
newoudseweg 1, NL-5621 BA Eindhoven (NL).(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE];  
Kottbygatan 5, Kista, S-164 85 Stockholm (SE).(72) Inventors: VAN HAAREN, Johannes, Albertus, Matthijs,  
Maria; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  
BROER, Dirk, Jan; Groenewoudseweg 1, NL-5621 BA  
Eindhoven (NL).(74) Agent: RAAP, Ariaan, Yde; Internationaal Octrooibureau B.V.,  
P.O. Box 220, NL-5600 AE Eindhoven (NL).(81) Designated States: JP, KR, SG, European patent (AT, BE, CH,  
DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

Without international search report and to be republished  
upon receipt of that report.

(54) Title: LIQUID CRYSTAL DISPLAY DEVICE AND RETARDATION FOIL

(57) Abstract

A liquid crystal display cell is provided with a compensation layer which, viewed transversely to the cell, has a broken (non-rotationally) symmetrical refractive index pattern or indicatrix. To obtain a small angle dependence, the associated birefringence of the compensation layer is complementary to that associated with a given voltage across the liquid crystal cell, so that the optical axis of the compensation layer substantially coincides with the direction of the directors in the driven state. The compensation layer can be manufactured in many different ways by making use of cholesteric foils or foils based on discotic LC materials.

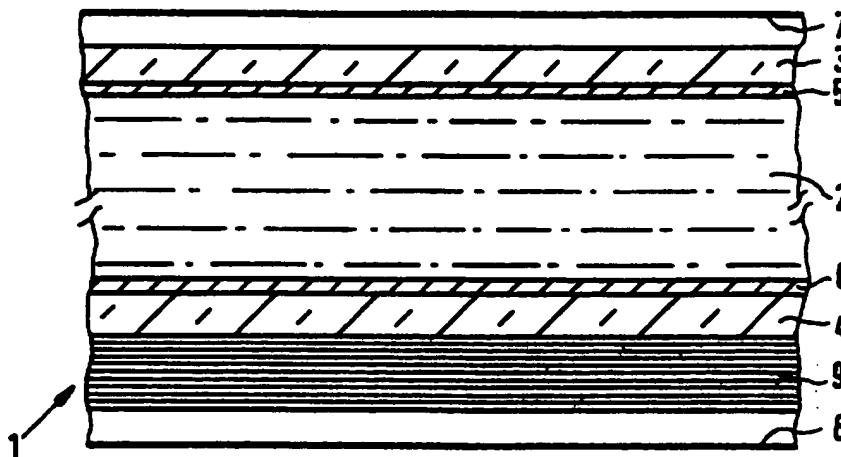



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Liquid crystal display device and retardation foil.

The invention relates to a liquid crystal display device having a display cell which comprises a layer of nematic liquid crystal material between two substrates provided with electrodes, said cell being further provided with polarizers and comprising at least an optically anisotropic layer of a material having a cholesteric ordering between the polarizers. The invention also relates to a liquid crystal display device having a display cell which comprises a layer of nematic liquid crystal material between two parallel substrates provided with electrodes, said cell being further provided with polarizers and comprising at least an optically anisotropic layer of polymer material between the polarizers. The invention further relates to retardation foils for use in liquid crystal display devices.

Display devices of this type are generally used in, for example monitors, TV applications and, for example display devices in automobiles and for instruments.

A display device of the type described in the opening paragraph is known from USP 5,210,630. In this display device a compensation foil consisting of an optically anisotropic layer of polymer material with a cholesteric ordering is used to inhibit discoloration and obtain a high contrast in a twisted nematic display device. The polymer material is ordered in such a way that a molecular helix can be distinguished, with the axis of the helix being directed transversely to the layer.

However, display devices provided with such compensation foils still have a large viewing angle dependence, *i.e.* the contrast is very much dependent on the angle at which and the direction from which the display device is being watched.

It is, *inter alia* an object of the invention to provide a display device of the type described above in which the angle dependence is considerably reduced. It is also an object of the invention to provide a (retardation) foil which can be used in such display devices.

A first display device according to the invention comprising a liquid crystal display cell with a layer of nematic liquid crystal material which is present between two substrates provided with electrodes and comprises polarizers and at least an optically

anisotropic layer of a material having a cholesteric ordering between the polarizers is therefore characterized in that, viewed transversely to the substrates, the director profile in the optically anisotropic layer has a non-rotationally symmetrical pattern. This can be ascertained by means of conoscopy.

5                   In this connection the phrase "director profile in the optically anisotropic layer" is understood to mean the director profile across a thickness of at least an entire height or pitch of the molecular helix. "Non-rotationally symmetrical" is herein understood to mean a pattern which does not exhibit any rotational symmetry and in which the finite thickness of the layer is not taken into consideration. The pattern may be symmetrical with respect to an  
10   arbitrary axis. In this application this will also be referred to as "broken (axial) symmetry". Due to this measure, the optical axis of the optically anisotropic layer extends at an angle to the axis transverse to the two substrates. The optical axis is herein understood to mean the direction having the smallest refractive index. In the above-mentioned polymer material having a molecular helix, the optical axis coincides with the axis of the helix.

15                   A second display device according to the invention, comprising a liquid crystal display cell with a layer of nematic liquid crystal material which is present between two parallel substrates provided with electrodes and comprises polarizers and at least an optically anisotropic layer of a polymer material between the polarizers is characterized in that the optical axis of the optically anisotropic layer extends at an angle to a direction  
20   transverse to the substrates. In this case the optical axis need not have the same direction throughout the thickness of the anisotropic layer.

                  The invention is based on the recognition that in practice and at the customary voltage across the liquid crystal material, the directors in this material still extend at a small angle to the direction transverse to the substrates. Consequently, the birefringence  
25   for different viewing angles is different and is not symmetrical with respect to a direction perpendicular to the two substrates, which accounts for the angle dependence of a liquid crystal having a nematic structure. It is true that this angle dependence may be reduced by means of a compensation foil; however, when a compensation foil is used in the device as described above, in which the axis of the helix is directed transversely to the polymer layer,  
30   the compensation is optimal for an isotropic liquid crystal layer, *i.e.* a situation in which the directors are directed perpendicularly to the substrates. In practice, this situation occurs only at very high voltages (still disregarding the fact that the molecules are anchored on the substrates in such a way that this is impossible close to the substrates).

                  According to the invention, by choosing a non-rotationally symmetrical

pattern for the director profile in the optically anisotropic layer, the angle dependence of the total device is changed in such a way that light beams which have undergone a large birefringence in the liquid crystal (at a given drive voltage, the "given voltage") are more compensated by the birefringence in the compensation layer than light beams which have undergone a small birefringence in the liquid crystal. As it were, the optical axis in the compensation layer is now substantially parallel to the average direction of the directors in the layer of liquid crystal material. Dependent on the voltage chosen, this "broken symmetry" can be adapted in given implementations of the invention. The "given voltage" is preferably chosen to be such that the described compensation of birefringence occurs in a near-zero transmission range; for example, the voltage in the voltage/transmission characteristic at which 10% of the maximum transmission occurs is used for this purpose.

A "broken symmetry" transverse to the substrates (or an optical axis not transverse to the two substrates) can be obtained by providing a compensation foil as described in USP 5,210,630 at an angle to these substrates. This embodiment is characterized in that the director profile in the optically anisotropic layer is parallel to boundary surfaces of the optically anisotropic layer, and the optically anisotropic layer is provided at an angle to one of the substrates.

The same solution may also be used if the liquid crystal display device comprises as an optically anisotropic layer a layer of polymerized discotic liquid crystal materials. Examples of such discotic liquid crystal materials are given in "Discotic Liquid Crystal", Liquid Crystals 1993, vol. 14, no. 1, pp. 3-14. Such a display device is characterized in that the average direction of the director in the optically anisotropic layer is transverse to the boundary surfaces of the optically anisotropic layer, and the optically anisotropic layer is provided at an angle to one of the substrates. In this case, the direction of the director coincides with the optical axis. In both cases, said angle is between 1 and 30 degrees and is preferably approximately 10 degrees.

In practice, a display having such a tilted compensator will soon become too thick. A preferred embodiment of the display device according to the invention, with a cholesteric ordering in the anisotropic layer, is therefore characterized in that the director profile in at least a part of the optically anisotropic layer is provided at an angle to the substrates. Similarly, a preferred embodiment of the display device according to the invention, with polymerized discotic liquid crystal materials in the anisotropic layer, is characterized in that the director profile in at least a part of the optically anisotropic layer is provided at an angle to the direction transverse to the substrates.

The optically anisotropic layer preferably has a sawtooth structure on at least one of its boundary surfaces. In a device using a plurality of pixels, the pitch of the sawtooth structure is preferably of the order of the pixel size, or smaller.

If the two boundary surfaces are formed with a sawtooth structure, the sawtooth directions, *i.e.* the directions in which the separate teeth increase in thickness, can be rotated, for example 90° with respect to each other. Such a structure has a smaller retardation (difference in optical path length for the ordinary and extraordinary light beam, also expressed as  $d \cdot \Delta n$ , with  $d$ : thickness of the material,  $\Delta n$ : optical anisotropy).

The broken symmetry can be obtained during manufacture by using polymer material obtained from a liquid crystal monomer. During the manufacture of one or both boundary surfaces, a pretilt can be imposed. Dependent on the choice of this pretilt, the optically anisotropic layer then acquires a "splay deformation". The ultimate director profile may also be influenced during manufacture by means of electric or magnetic fields, or both. This may result, for example in a preferred direction for the directors (cholesteric materials) or in a variation of the directors (discotic materials) in the anisotropic layer.

The optically anisotropic layer may alternatively consist of sub-layers; for example, the layer may comprise a uniaxial foil as a sub-layer. The director profile may also extend locally across only a part of the thickness of the layer.

A further preferred embodiment of a display device according to the invention, with a cholesteric ordering in the anisotropic layer, is characterized in that the pitch of the cholesteric material is smaller than 0.25 micrometer. It is thereby achieved that, for example the part of the s-polarized light which is converted by the cholesteric effect of the anisotropic layer into p-polarized light is as small as possible so that the number of grey tints to be realised is considerably increased.

A (retardation) foil according to the invention, comprising an optically anisotropic layer of a material having a cholesteric ordering, is characterized in that, viewed transversely to the foil, the director profile in the optically anisotropic layer has a non-rotationally symmetrical pattern.

A preferred embodiment is characterized in that the director profile in at least a part of the optically anisotropic layer is provided at an angle to the boundary surfaces. In this respect, the boundary surfaces are understood to mean the macroscopic boundary surfaces transverse to the normal on the foil, in which possible disturbances in smoothness, provided deliberately or not deliberately, (such as, for example a sawtooth structure as mentioned above) are not taken into consideration.

Another foil comprising an optically anisotropic layer of a polymer material is characterized in that the optical axis of the optically anisotropic layer extends at an angle to a direction transverse to the substrates.

A further preferred embodiment of such a foil is characterized in that the  
5 optically anisotropic layer comprises a layer of polymerized discotic liquid crystal materials.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

10 Fig. 1 is a diagrammatic cross-section of a part of a liquid crystal display device according to the invention,

Fig. 2 shows a part of the device of Fig. 1,

Fig. 3 shows diagrammatically the optical behaviour of the device of Fig. 2, with indicatrices,

15 Fig. 4 shows diagrammatically a number of variants of the device of Fig. 1,

Fig. 5 shows the structure formula of a liquid crystal composition as used in an optically anisotropic layer with a cholesteric ordering,

20 Fig. 6 shows the possible external influence of the director pattern in such an optically anisotropic layer during its manufacture, while

Fig. 7 shows a possible distribution in the director pattern after such an external influence, and

25 Fig. 8 shows diagrammatically how the angle dependence is reduced by means of the optically anisotropic layer at different voltages in the transmission/voltage characteristic.

Fig. 1 is a diagrammatic cross-section of a part of a liquid crystal display device comprising a liquid crystal cell 1 with a twisted nematic liquid crystal material 2 being present between two substrates 3, 4 of, for example glass, provided with electrodes 5, 6. The device further comprises two polarizers 7, 8 whose direction of polarization is mutually crossed perpendicularly. The device further comprises orientation layers (not shown) which orient the liquid crystal material on the inner walls of the substrates, in this example in the direction of the axes of polarization of the polarizers, such that the cell has a twist angle of 90 degrees. In this case, the liquid crystal material has a positive optical

anisotropy and a positive dielectric anisotropy. If the electrodes 5, 6 are energized with an electric voltage, the molecules, and hence the directors, orient themselves to the field. In the ideal case, all molecules are thus substantially perpendicular to the two substrates (situation 11 in Fig. 2). However, in practice this situation requires a too high voltage; at customary  
5 voltages, the molecules extend at a smaller angle to the normal on the substrates 3, 4, corresponding to situation 12 in Fig. 2. From the direction 13 the viewing angle is rather in the direction of the molecules so that said angle dependence still occurs for light which is still transmitted at this voltage. This angle dependence may be explained by means of the "optical indicatrix", a three-dimensional geometric representation of the refractive index for  
10 each direction in which the vector of the electric field component of the light can oscillate. For optically isotropic material it is convex, for biaxial material it is an ellipsoid and for uniaxial material it is an ellipsoid having an axial symmetry. Since in the ideal case the liquid crystal material in the driven state is uniaxial substantially throughout its thickness (in substantially all molecule layers, except for some molecule layers near the substrates, the  
15 molecules are perpendicular to the substrates) the situation 11 of Fig. 2 can be represented by means of the indicatrix 14 in Fig. 3 with an ellipsoid shape and the principal axis transverse to the liquid crystal layer, the refractive index  $n_z$  perpendicular to the substrates being larger than that in the planes parallel to the substrates ( $n_x = n_y$ ).

Since the liquid is not isotropic, there is birefringence. It can be shown  
20 that this birefringence can be compensated with an indicatrix 15 in Fig. 3 having an ellipsoid shape and an axis transverse to the liquid crystal layer, the refractive index  $n_z$  perpendicular to the substrates being smaller than that in the planes parallel to the substrates ( $n_x = n_y$ ). The compensation layers as described in EP-A 0,372,973 may be manufactured in such a way that the associated indicatrix satisfies this. Such a compensation layer comprises a  
25 cholesteric material with the molecular axis of the helix being transverse to the layer, so that the director pattern, viewed transversely to the layer, is rotationally symmetrical.

For the more practical situation 12 in Fig. 2, the indicatrix 14' has a principal axis which extends at a small angle to the axis transverse to the liquid crystal layer; it is, as it were, slightly tilted. A compensation layer 9 between the liquid crystal material  
30 and the polarizer 8, with indicatrix 15 which is optimal for the situation 11 will have very little effect in this case.

The invention provides optically anisotropic compensation layers 9 having such an indicatrix 15' that the birefringence is substantially entirely compensated for the more practical adjustment of, for example situation 12; as it were, the indicatrix 15' is tilted

in the same way with respect to the principal axis as the indicatrix 14'. Viewed in a direction perpendicular to the substrates, the director pattern in the optically anisotropic layer thus acquires a non-rotationally symmetrical pattern.

The director pattern in the optically anisotropic layer may be rotationally symmetrical itself, for example if a cholesteric foil having an optically anisotropic layer as described in EP-A 0.423.881 is used. Alternatively, discotic (disc-shaped) liquid crystal materials may be used as basic materials for the anisotropic compensation layer 9. These discotic molecules may be provided with reactive groups so as to polymerize the materials. By means of polymerization, and dependent on, for example temperature or other peripheral conditions, the desired ordering may then be provided. Here again, a layer is obtained with a refractive index  $n_z$  transverse to the anisotropic compensation layer and being smaller than that in the planes parallel to the anisotropic compensation layer ( $n_x = n_y$ ).

By slightly tilting this foil 9 (Fig. 4a), a broken director pattern, viewed transversely to the substrates, is obtained. To avoid reflections, the interspace may be filled up with a material 10 having the same refractive index as the substrate material or as the foil material, for example UV-polymerized ethoxylated bisphenol-A diacrylate.

At larger dimensions, such a construction will become very thick. For the procedure of manufacturing the cholesteric filters, viz. providing a liquid chiral crystal monomer as a thin film on substrates, as is shown in Fig. 5 and subsequent (photo)polymerization, there are a number of variations yielding favourable results, as shown in Fig. 6. For example, the manufacturing procedure may be based on sawtooth-shaped substrates, which results in a foil 9 as is shown in Fig. 4b. The resultant optically anisotropic layer now has a sawtooth structure at both sides, the long sides of the sawtooth extending at a small angle to the substrates 3, 4. If no special measures are taken during manufacture, the directors of the molecules of the cholesteric liquid crystal material from which the foil 9 is made direct themselves parallel to these long sides, which is shown by means of the shaded structure in the optically anisotropic layer (foil) 9 in Figs. 1 and 4. The optical axis of the foil 9 now no longer coincides with the optical axis of the liquid crystal cell formed by the liquid crystal material 2 and the substrates 3 (because the director profile in at least a part of the optically anisotropic layer is provided at an angle to the boundary surfaces, the boundary surface being considered as a surface bounding the foil transverse to the foil, while surface disturbances such as the teeth of the sawtooth in this example are ignored. The director profile in the foil thus has a broken symmetry, viewed transversely to the substrate 3, 4. To avoid optical disturbance by the sawtooth pattern, the pitch of the sawtooth is chosen to be



smaller than the dimension of a pixel of the display device. The sawtooth patterns at both sides of the foil may be rotated with respect to each other, for example through 90 degrees. The total structure then has a smaller retardation.

The sawtooth structure may alternatively be provided on one boundary surface only, so that a splay deformation is introduced in the foil 9 (Fig. 4c). The directors then have an angle to a plane parallel to the substrates over a part of the thickness of the foil, so that a broken axial symmetry is obtained again. The same can be achieved by making use of flat substrates during manufacture and by inducing a pretilt on one or both surfaces when the liquid cholesteric material is being provided; upon subsequent freezing (netting) of the structure, this structure is maintained so that again a number of directors has an angle to a plane parallel to the substrates and a broken axial symmetry is obtained.

The anisotropic layers based on discotic liquid crystal materials may also be given such a structure. The directors of the discotic molecules now extend at an angle to the normal and, viewed transversely to the substrates 3, 4, the foil again has a broken symmetry.

The sawtooth structure may again be provided on one boundary surface only so that a bend deformation is introduced in the foil 9. The directors are not directed transversely to the substrates over a part of the thickness of the foil, so that a broken axial symmetry is obtained again.

During photopolymerization, there may be an electric field, denoted by the arrow 18 in Fig. 6a, perpendicular to the surfaces 16 in this example, in which the directors 17 are situated (when manufacturing cholesteric layers). Under the influence of this field (which is provided, for example on electrodes parallel to the layer to be formed, in which possibly one of the electrodes may be provided on the substrate of the liquid crystal cell), the molecules are tilted. To tilt all molecules in the same direction (uniform tilt), a substrate is preferably used which induces a pretilt in the same way as described hereinbefore. If tilting is induced by means of a magnetic field, it can be oriented obliquely to the surfaces 16, as is denoted by arrow 19 in Fig. 6b.

Without special measures, the director is situated along a helix transverse to the compensation layer which has a small pitch with respect to the thickness of the compensation layer. Such a compensator has axial symmetry, *i.e.* all directions of the director occur to a substantially equal extent; there is no preference for a given azimuth angle  $\vartheta$ . This is shown by means of a broken line in Fig. 7. This axial symmetry can be broken by exposing the cholesteric layer during polymerization to a magnetic field transverse

to the layer, so that a preference for given azimuth angles is introduced, which is shown by means of the line 21 in Fig. 7.

The extent of asymmetry may be increased by adding a uniaxial foil having a small  $\Delta n$  to the foil 9; this may be, for example the substrate on which the monomer layer is provided (for example (stretched) cellulose triacetate or (stretched) polycarbonate). Alternatively, the layer may be slightly stretched after the polymerization has been partly finished, while the birefringence of the stretched substrate on which the monomer layer is provided may also contribute to the breaking of the symmetry.

The last-mentioned measures (influencing with an electric or magnetic field, providing a uniaxial foil having a small birefringence, stretching of the layer) may also be used for disturbing the axial symmetry in the foil in layers based on discotic materials.

The extent of "refraction" of the symmetry is also determined by the voltage range in which birefringence must be compensated so as to obtain complete extinction. For example, a range 22 in the transmission/voltage curve may be chosen around a given voltage  $V_{comp}$  (Fig. 8a) in which the position of the directors in the liquid crystal material hardly deviates from that shown in the situation 11 of Fig. 2. In this case, a slightly broken symmetry is sufficient. When a range 22' in the transmission/voltage curve is chosen around a given voltage  $V'_{comp}$  (Fig. 8b) in which the position of the directors in the liquid crystal material deviates considerably from that in the situation 11 of Fig. 2, a much stronger broken symmetry must be used. Optimum extinction can be obtained by rotating the compensation layer with respect to the liquid crystal layer, if necessary. Alternatively, the anisotropic layer 9 may be provided with areas having a more or less broken symmetry. In the first areas the viewing angle dependence is then slightly overcompensated, while it is compensated slightly too little in the other areas. The dimension of the areas is smaller than that of a pixel. In this way, a symmetrical viewing angle dependence is obtained. The invention is of course not limited to the examples shown. For example, a plurality of foils (anisotropic layers) 9 may be arranged one behind the other and, for example each of them may compensate optimally for a different given voltage  $V_{comp}$ . Alternatively, for example two foils may be provided on different sides of the liquid crystal layer.

In summary, the invention provides a liquid crystal display cell with one or more compensation layer(s) and, viewed transversely to the cell, a broken (non-rotationally symmetrical) refractive index pattern or indicatrix. To obtain a small angle dependence, the associated birefringence of the compensation layer is complementary to that associated with a given voltage across the liquid crystal cell. The compensation layer may be

**manufactured in many different ways by making use of cholesteric or discotic f ilms for this layer.**

**CLAIMS:**




1. A liquid crystal display device having a display cell which comprises a layer of nematic liquid crystal material between two substrates provided with electrodes, said cell being further provided with polarizers and comprising at least an optically anisotropic layer of a material having a cholesteric ordering between the polarizers, characterized in that, viewed transversely to the substrates, the director profile in the optically anisotropic layer has a non-rotationally symmetrical pattern.
2. A liquid crystal display device having a display cell which comprises a layer of nematic liquid crystal material between two substrates provided with electrodes, said cell being further provided with polarizers and comprising at least an optically anisotropic layer of a polymer material between the polarizers, characterized in that the optical axis of the optically anisotropic layer extends at an angle to a direction transverse to the substrates.
3. A liquid crystal display device as claimed in Claim 1 or 2, characterized in that the optical axis of the optically anisotropic layer is substantially parallel to the direction of the directors of the liquid crystal molecules, taken at an average across the layer of nematic liquid crystal material at a given voltage.
4. A liquid crystal display device as claimed in Claim 3, characterized in that the transmission is substantially zero at the given voltage.
5. A liquid crystal display device as claimed in any one of Claims 1 to 5, characterized in that the optically anisotropic layer comprises a layer of polymer material having a cholesteric ordering.
6. A liquid crystal display device as claimed in Claim 5, characterized in that the director profile in the optically anisotropic layer is parallel to boundary surfaces of the optically anisotropic layer, and the optically anisotropic layer is provided at an angle to one of the substrates.
7. A liquid crystal display device as claimed in Claim 5, characterized in that the director profile in at least a part of the optically anisotropic layer is provided at an angle to the substrates.
8. A liquid crystal display device as claimed in Claim 5, characterized in that there is a preferred direction within the director profile.

9. A liquid crystal display device as claimed in Claim 5, characterized in that the director profile in the optically anisotropic layer locally extends across only a part of the thickness of the layer.
10. A liquid crystal display device as claimed in any one of Claims 5 to 9,  
5 characterized in that the pitch of the cholesteric material is smaller than  $0.25\ \mu\text{m}$ .
11. A liquid crystal display device as claimed in any one of Claims 1 to 4, characterized in that the optically anisotropic layer comprises a layer of polymerized discotic liquid crystal material.
12. A liquid crystal display device as claimed in Claim 11, characterized in  
10 that the average direction of the director in the optically anisotropic layer is transverse to the boundary surfaces of the optically anisotropic layer, and the optically anisotropic layer is provided at an angle to one of the substrates.
13. A liquid crystal display device as claimed in Claim 11, characterized in that the average direction of the director in the optically anisotropic layer is provided at an  
15 angle to the direction transverse to the substrates.
14. A liquid crystal display device as claimed in Claim 11, characterized in that the average direction of the director in the optically anisotropic layer varies.
15. A liquid crystal display device as claimed in Claim 5 or 11, characterized  
20 in that the optically anisotropic layer has a sawtooth structure on at least one of its boundary surfaces.
16. A liquid crystal display device as claimed in Claim 15, characterized in that both boundary surfaces of the optical anisotropic layer have a sawtooth structure whose direction is rotated with respect to each other.
17. A liquid crystal display device as claimed in Claim 15 or 16,  
25 characterized in that the optically anisotropic layer also comprises a layer having a uniaxial symmetry.
18. A retardation foil comprising an optically anisotropic layer of a material having a cholesteric ordering, characterized in that, viewed transversely to the foil, the director profile in the optically anisotropic layer has a non-rotationally symmetrical pattern.
- 30 19. A retardation foil comprising an optically anisotropic layer of a polymer material, characterized in that the optical axis of the optically anisotropic layer extends at an angle to a direction transverse to the substrates.
20. A retardation foil as claimed in Claim 18 or 19, characterized in that the optically anisotropic layer comprises a layer of a polymer material having a cholesteric

ordering.

21. A retardation foil as claimed in Claim 20, characterized in that the director profile in at least a part of the optically anisotropic layer is provided at an angle to the boundary surfaces.
- 5 22. A retardation foil as claimed in Claim 20, characterized in that there is a preferred direction within the director profile.
23. A retardation foil as claimed in Claim 20, characterized in that the director profile in the optically anisotropic layer locally extends across only a part of the thickness of the layer.
- 10 24. A retardation foil as claimed in any one of Claims 20 to 23, characterized in that the pitch of the cholesteric material is smaller than 0.25 micrometer.
25. A retardation foil as claimed in Claim 19, characterized in that the optically anisotropic layer comprises a layer of polymerized discotic liquid crystal material.
26. A retardation foil as claimed in Claim 25, characterized in that the
- 15 average direction of the director in the optically anisotropic layer is transverse to the boundary surfaces of the optically anisotropic layer, and the optically anisotropic layer is provided at an angle to one of the substrates.
27. A retardation foil as claimed in Claim 25, characterized in that the average direction of the director in the optically anisotropic layer is provided at an angle to
- 20 the direction transverse to the substrates.
28. A retardation foil as claimed in Claim 25, characterized in that the average direction of the director in the optically anisotropic layer varies.
29. A retardation foil as claimed in Claim 20 or 25, characterized in that the optically anisotropic layer has a sawtooth structure on at least one of its boundary surfaces.
- 25 30. A retardation foil as claimed in Claim 29, characterized in that both boundary surfaces of the optical anisotropic layer have a sawtooth structure whose direction is rotated with respect to each other.
31. A retardation foil as claimed in Claim 29 or 30, characterized in that the optically anisotropic layer also comprises a layer having a uniaxial symmetry.

1/3

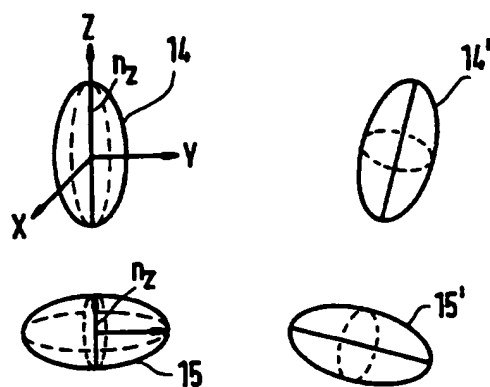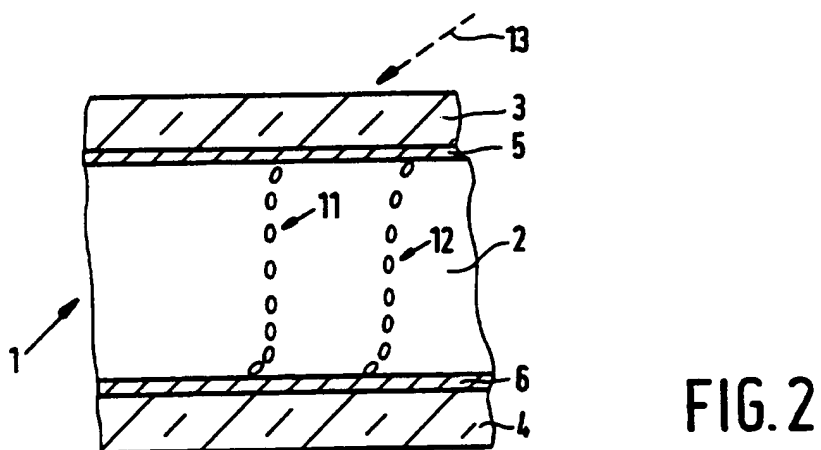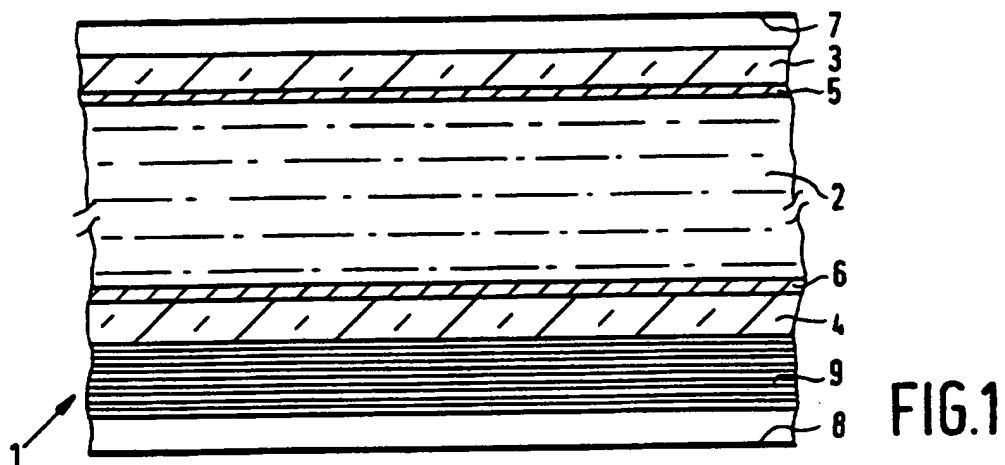

2/3

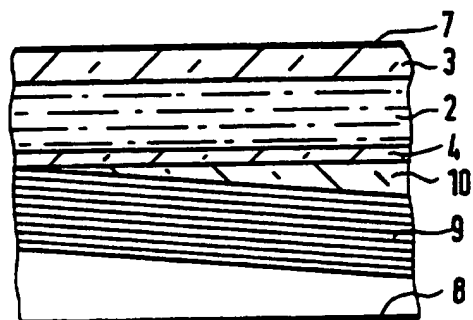


FIG. 4a

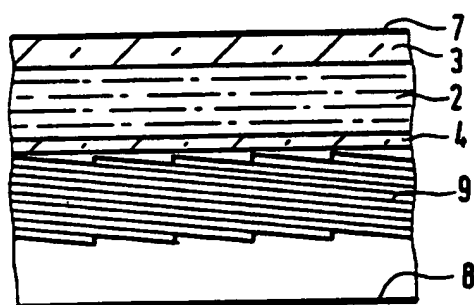


FIG. 4b

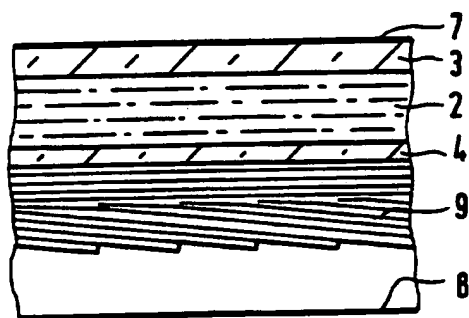


FIG. 4c



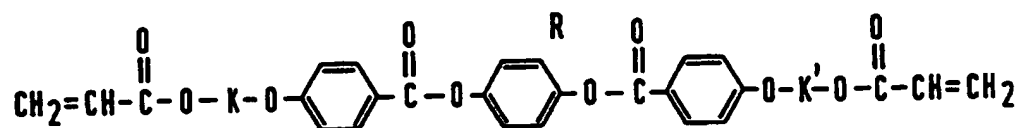


FIG. 5



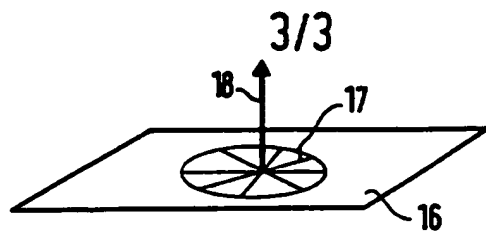


FIG. 6a

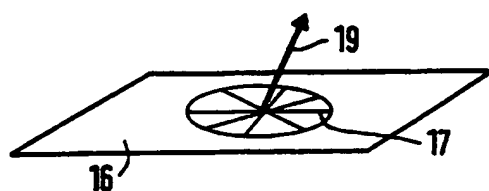


FIG. 6b


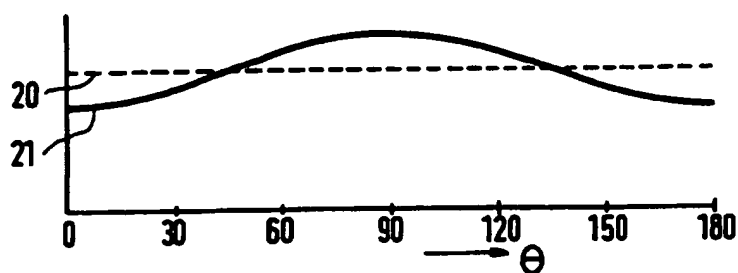


FIG. 7

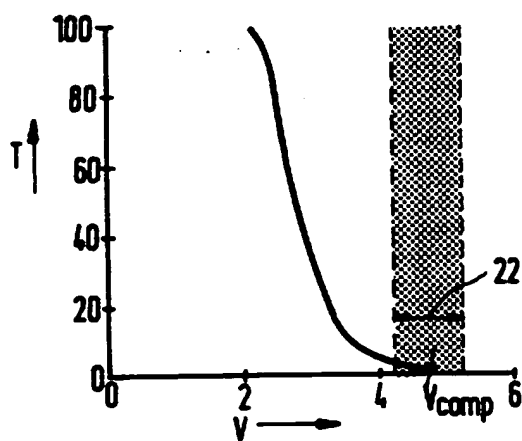


FIG. 8a

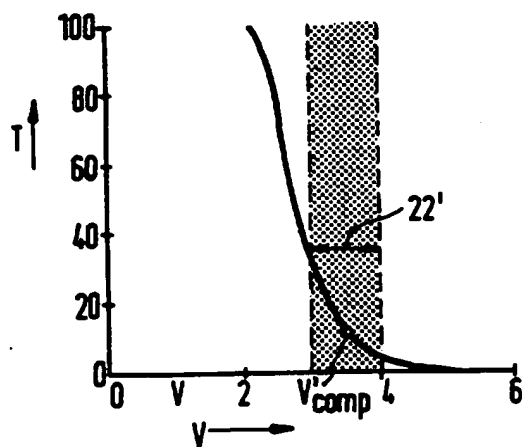


FIG. 8b

**THIS PAGE BLANK (USPTO)**